

Specification				
Identification				
1.1	Manufacturer	Hyundai	Hyundai	Hyundai
1.2	Manufacturer's type designation	15D-7E	18D-7E	20DA-7E
1.3	Drive: electric (battery or mains),diesel,petrol,fuel gas,manual	DIESEL	DIESEL	DIESEL
1.4	Type of operation:hand,pedestrian,standing,seated,order-picker	seated	seated	seated
1.5	Load capacity / rated load	kg 1,500	1,750	2,000
1.6	Load center distance	c mm 500	500	500
1.8	Load distance, center of drive axle to fork	x mm 393	393	398
1.9	Wheelbase	y mm 1,410	1,410	1,410
Weights				
2.1	Service weight	kg 2,800	2,970	3,116
2.2	Axle loading, loaded front/rear	kg 3,740 / 560	4,103 / 617	4,478 / 643
2.3	Axle loading, unloaded front/rear	kg 1,290 / 1,510	1,245 / 1,725	1,200 / 1,916
Wheels, Chassis				
3.1	Tires:solid rubber, superelastic, pneumatic, polyurethane	pneumatic	pneumatic	pneumatic
3.2	Tires size, front	6.50-10-12PR	6.50-10-12PR	6.50-10-12PR
3.3	Tires size, rear	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR
3.5	Wheels, number front x rear (x=driven wheels)	x2 / 2	x2 / 2	x2 / 2
3.6	Track width, front	mm 890	890	890
3.7	Track width, rear	mm 910	910	910
Basic Dimensions				
4.1	Mast / fork carriage tilt forward / backward (α / β )	degrees 6 / 10	6 / 10	6 / 10
4.2	Lowered mast height	h1 mm 2,155	2,155	2,155
4.3	Free lift	h2 mm 145	145	150
4.4	Lift height	h3 mm 3,325	3,325	3,330
4.5	Extended mast height	h4 mm 4,332	4,332	4,342
4.7	Overhead guard (cab) height	h5 mm 2,110	2,110	2,110
4.8	Seat height / standing height	h7 mm 1,127	1,128	1,128
4.12	Coupling height	h10 mm 271	271	270
4.19	Overall length	l1 mm 3,133	3,163	3,208
4.20	Length to face of forks	l2 mm 2,233	2,263	2,308
4.21	Overall width	b1 mm 1,070	1,070	1,070
4.22	Fork dimensions(hook type)	s / e / l mm 900 x 100 x 35	900 x 100 x 35	900 x 100 x 40
4.23	Fork carriage ISO 2328, class / type A,B	2A	2A	2A
4.24	Fork-carriage width	b12 mm 980	980	980
4.31	Ground clearance, loaded, under mast	m1 mm 120	120	120
4.32	Ground clearance, centre of wheelbase	m2 mm 143	142	140
4.33	Aisle width for pallets 1,000x1,200 crossways (LxW)	Ast mm 3,594	3,621	3,662
4.34	Aisle width for pallets 800x1,200 lengthways (WxL)	Ast mm 3,794	3,821	3,862
4.35	Turning radius	Wa mm 2,000	2,027	2,063
4.36	Smallest pivot point distance	b13 mm 589	589	589
Performance Data				
5.1	Travel speed, unloaded	km/h 19.0	19.0	19.1
5.2	Lift speed, loaded/ unloaded	mm/sec 620 / 650	620 / 650	620 / 650
5.3	Lowering speed, loaded/unloaded	mm/sec 500 / 450	500 / 450	500 / 450
5.6	Max. Drawbar pull, loaded	N 15,722	15,811	15,935
5.7	Gradient performance, loaded/ unloaded	% 36.9 / 24.5	33.1 / 22.2	30.9 / 20.5
5.9	Acceleration time, loaded/ unloaded(10m)	sec NA	NA	NA
5.10	Service brake	FOOT	FOOT	FOOT
Engine				
6.1	Engine manufacturer / type	KUBOTA V2203	KUBOTA V2203	KUBOTA V2203
6.2	Engine power acc. to ISO 1585	kw 30.8	30.8	30.8
6.3	Rated speed	1/min 2,400	2,400	2,400
6.4	No. of cylinder / cubic capacity	anz/cm³ 4 / 2,197	4 / 2,197	4 / 2,197
6.5	Fuel consumption acc. To VDI cycle	ℓ /h 2	2	2
Other Details				
8.1	Type of drive control	power shift	power shift	power shift
8.2	Operating pressure (MAIN / SECONDARY)	bar 187 / 147	187 / 147	187 / 147
8.3	Oil volume	ℓ 60	60	60
8.4	Sound level at driver's ear according to (DIN 12 053)	db(A) 88	88	84

1)w/with DZ mast +25mm; with integrated sideshift x=375mm(with DZ mast +25mm);with hook-on sideshift x =410.5mm(with DZ mast +25mm)



\*Some of the photos may include optional

Contact your Hyundai dealer for more information. The machine shown may vary according to International standards.  
All US measurement rounded off to nearest pounds or inches.



www.hyundai-mh.com



HYUNDAI MATERIAL HANDLING Environmentally - Friendly


15D/18D/20DA-7E



15D/18D/20DA-7E

## New criterion of Forklift Trucks

Hyundai introduces a new line of 7E-series diesel forklift trucks.  
Excellent power and performance makes your business more profitable.

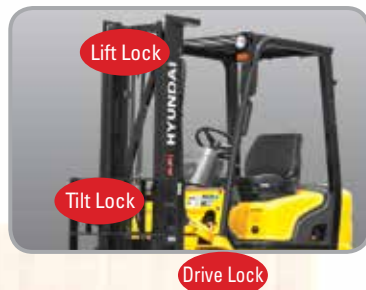

### OPSS (Operator Presence Sensing System)

Control of mast tilting, lifting and lowering is not possible through operation of the appropriate control when the operator is not in the normal position. (Option)



\*Some of the photos may include optional.



# High Power & Performance

## Powerful Engine KUBOTA V2203 Engine


Market approved quality of Kubota V2203 engine ensures incomparable performance, durability and additional value to the machine. 30.8kW of the engine is more than enough to suit any work, not just with normal 30.8kW but with special attachments requiring high power as well.  
(EPA / Tier-3 Certified)

30.8kW/2,300rpm



## State-of-the-art hydraulic system

The latest large-capacity hydraulic system reacts quickly during operation, and a low-noise control valve increases both efficiency and durability.

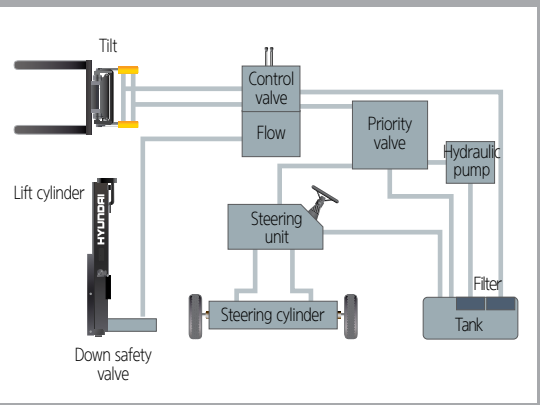

## The new master on the job-site!

Smooth running, efficient and ergonomically designed, 15D/18D/20DA-7E series are made to meet your needs.



■ Some of the photos may include optional equipment.



## Fast and stable performance

Being able to quickly raise and lower the mast, as well as tilt it forward and backward, provides the best operational conditions during unloading. When the truck is fully loaded, mast lowering speed is carefully controlled to ensure safety by the down control valve.

## Faster travel speed & gradeability

The powerful high-output engine provides greater acceleration, better gradeability and faster travel speed on any tough terrain or slope.



## Increased mast tilting angle

The mast tilting angle of 6 degrees forward and 10 degrees backward, the operator can safely and rapidly perform loading and unloading jobs.



## Wet disc brake system

The wet disc brake system is virtually maintenance free and is enclosed to protect from dust and water.



## Fully hydrostatic power steering

A hydraulic steering system always guarantees smooth and flexible steering, preventing overrun and kick-



## Key-locking fuel cap

Increased security on job sites with locking fuel cap, plus an increased capacity fuel tank for less down



# Comfortable Operation



## Adjustable steering wheel

Steering wheel with horn button can be adjusted by a lever on the right-hand side for the most comfortable operator position.



## Easy and safe shift lever

A single lever on the left side of the steering column gives the operator fast, easy control of



## Multi-function switch lever

Multi-functional switch lever gives easy access to lights and horn.



## Quick response of operating control levers

Only minimal operator's effort is required for precise, safe and productive control.



# Ergonomically designed with the operator in mind!

A design based on human engineering relieves fatigue and increase operator's efficiency.

Some of the photos may include optional equipment.



## Ergonomically positioned pedals

Based on human engineering, the accelerator, brake and inching pedals are optimally positioned for convenience while operating the equipment.



## Cup holder & console box

Additional storage spaces are located inside the operating space for operator's convenience.



## New high visibility for safe operation

The operator is able to work with increased safety and accuracy due to a wider view mast.

## Operator friendly gauges and water-resistant monitor panel



- 1 Parking brake lamp
- 2 Directional indicators
- 3 Fuel warning lamp
- 4 Engine oil warning lamp
- 5 Transmission oil temperature warning lamp
- 6 Battery charging warning lamp
- 7 Air cleaner filter warning light
- 8 Working light indicator
- 9 Water separator lamp
- 10 Pre-heater indicator
- 11 Water temperature gauge
- 12 Fuel gauge
- 13 Hour meter
- 14 Engine check lamp
- 15 Seat belt warning
- 16 OPS warning

## Easily adjustable suspension seat

An attractive and adjustable seat, based on a human engineering design, provides great comfort, safety and durability.



## Full floating overhead guard mount

The anti-vibration rubber is installed between the guard and truck frame to reduce the source of vibration and noise while driving. This not only reduces operator's fatigue but also





# Endurance & Safety

## Strong overhead guard

The safety overhead guard exceeds EEC and ANSI regulations and protects the operator during hazardous jobs.



## Parking brake

Ratchet type parking brake requires less efforts from the operator to set.



## Highly durable split type drive axle

The bevel gear set and hub reduction axle smoothly delivers desired torque to the drive wheels.

# Enhanced safety through high durability!

Safety and durability are priorities in the design of the equipment.




■ Some of the photos may include optional



## Large footboard & hand grip

Wide "open" step offers convenience and safety when entering and exiting truck.

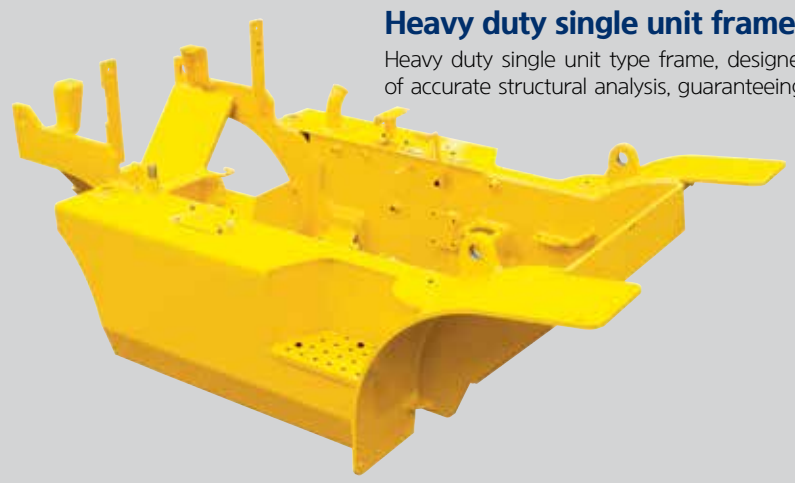

## Heavy duty single unit frame

Heavy duty single unit type frame, designed on the basis of accurate structural analysis, guaranteeing durability and



## Easy access of electrical Components

Various electric parts are centralized in dash board resulting in improve-ment in maintaince.




## Expansion bellows

The expansion bellows absorbs vibration and reduces noise generated from the exhaust gas system and also extends the life cycle of exhaust gas system.



## Bright, protected headlights

Bright, protected headlights is positioned for exceptional visibility.



## Ground clearance

The engine and transmission are assembled horizontally and positioned high in the frame to protect expansive components during operation on rugged



Durability **Easy** Maintenance



**Electrically monitored air filter**

Air cleaner sensor alerts the operator of a restricted air filter and allows replacement before



**Brake fluid reservoir**

Highly visible, easily accessible reservoir makes for quicker daily inspections.



**An accessible, compact fuse box for easy inspection**



**Centralized design for easy service!**

An ideal arrangement of component parts ensures easy access and convenience for maintenance.



**Easy change air cleaner**


The air filter is readily accessible for cleaning or replacement. (7inch Cyclone Type)



**Portable side cover**



**Rotational battery installation**



**Aluminum radiator with superb protection against heat**



**Quick and easy engine oil check**

**Mast Specification**

Mast Type		Overall Height Lowered	Maximum Fork Height		Free Lift				Tilt Angle (deg)		Load Capacity w / o Side Shift (500 mm) LC Single Tire			Load Capacity w / Side Shift (500 mm) LC Single Tire			Truck Weight Unload Single Tire		
					With bkr		With / o bkr				15D-7E	18D-7E	20DA-7E	15D-7E	18D-7E	20DA-7E	15D-7E	18D-7E	20DA-7E
			15D/18D 20DA-7E	15/18D-7E	20DA-7E	15D/18D-7E	20DA-7E	15D/18D-7E											
			mm	mm	mm	mm	mm	mm	mm	mm	Fwd	Bwd	kg	kg	kg	kg	kg	kg	kg
2-Stage Limited Free Lift	V250	1,755	2,525	2,530	145	150	145	150	6	10	1,500	1,750	2,000	1,400	1,650	1,890	2,746	2,916	3,063
	*V330	2,155	3,325	3,330	145	150	145	150	6	10	1,500	1,750	2,000	1,400	1,650	1,890	2,800	2,970	3,116
	V350	2,255	3,525	3,530	145	150	145	150	6	10	1,500	1,750	2,000	1,400	1,650	1,890	2,813	2,983	3,130
3-Stage Full Free Lift	V400	2,505	4,025	4,030	145	150	145	150	6	10	1,470	1,700	1,550	1,390	1,600	1,470	2,851	3,021	3,168
	TF370	1,805	3,735	3,740	798	803	1,299	1,300	6	6	1,500	1,720	1,900	1,400	1,650	1,810	2,914	3,065	3,221
	TF430/TS430	2,005	4,335	4,340	998	1,003	1,499	1,500	6	6	1,420	1,620	1,800	1,360	1,560	1,720	2,953	3,103	3,259
	TF450/TS450	2,105	4,535	4,540	1,098	1,103	1,599	1,600	6	6	1,400	1,600	1,700	1,340	1,530	1,620	2,964	3,123	3,279
	TF470/TS470	2,155	4,735	4,740	1,148	1,153	1,649	1,650	6	6	1,370	1,470	1,400	1,310	1,410	1,350	2,984	3,134	3,290
	TS500	2,255	5,035	5,040	1,248	1,253	1,749	1,750	6	6	1,350	1,420	1,050	1,290	1,370	1,020	3,022	3,154	3,310
	TF550	2,455	5,535	5,540	1,448	1,453	1,949	1,950	6	5	1,120	1,120	800	1,070	1,080	780	3,094	3,192	3,348
	TF600/TS600	2,655	6,035	6,040	1,648	1,653	2,149	2,150	6	5	770	770	500	750	750	490	3,138	3,264	3,420
	TF700	3,055	7,035	7,040	2,048	2,053	2,549	2,550	3	3	375	375	325	365	365	315	3,174	3,344	3,500

\* Standard

**Load Capacity**

